




# N4POE PoE NVR




## FEATURES

- Up to 4ch IP cameras access
- Up to 8MP resolution for live view and recording
- Intelligent analysis by NVR: Intrusion (support the accurate detection of vehicle and human)
- 1 SATA hard disk up to 12TB
- 1 RJ45 10/100Mbps network interface
- 4ch POE ports
- Smart search & playback
- Support cloud upgrade

## OVERVIEW

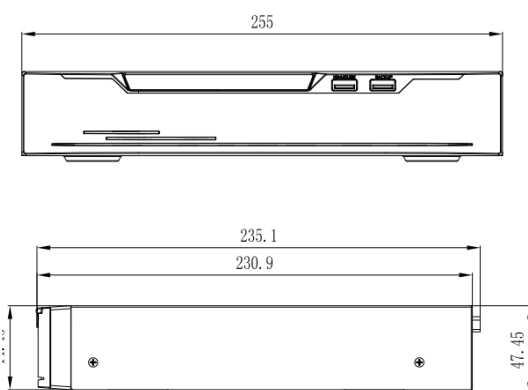

## REAR PANEL

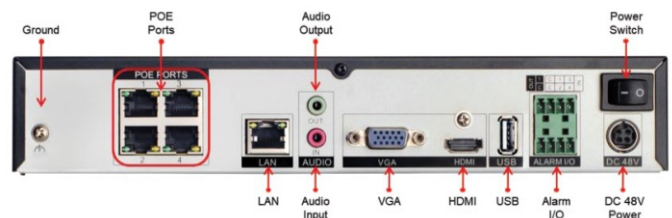

### Video Input

|                    |           |
|--------------------|-----------|
| IP Camera Input    | 4 Channel |
| Incoming Bandwidth | 40 Mbps   |
| Outgoing Bandwidth | 40 Mbps   |

### Video Output

|                      |                                           |
|----------------------|-------------------------------------------|
| HDMI Output          | 3840×2160, 1920×1080, 1280×1024, 1024×768 |
| VGA Output           | 1920×1080, 1280×1024, 1024×768            |
| Decoding Capacity    | 1ch 8MP, 4ch 1080P@30fps                  |
| Dual Stream          | Support                                   |
| Multi-screen Display | 1/4                                       |

# PoE NVR 4CH

## Recoding

|                |                                               |
|----------------|-----------------------------------------------|
| Resolution     | 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc. |
| Recording Mode | Manual, Schedule (Regular, Continuous), Event |
| Trigger Events | Motion Detection, Video Loss, Alarm in, IVS   |

## Playback and Backup

|               |                                        |
|---------------|----------------------------------------|
| Sync Playback | 4/1                                    |
| Search Mode   | Time /Date, Alarm, Picture grid, Event |
| Backup Mode   | USB Device, Network                    |

## Alarm

|                      |                                                                                  |
|----------------------|----------------------------------------------------------------------------------|
| General Alarm        | Motion Detection, Video Loss, Alarm in, Alarm out, IVS (by camera)               |
| Abnormal Alarm       | Disk Alarm, IP Address Conflict, Network Disconnect                              |
| Intelligent Analysis | Intrusion detection (support the accurate detection of vehicle and human) by NVR |

## Network

|                  |                                                                                                                    |
|------------------|--------------------------------------------------------------------------------------------------------------------|
| Network Function | HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE |
| Remote Users     | 8 users                                                                                                            |
| Smart Phone      | iPhone, iPad, Android                                                                                              |
| Interoperability | ONVIF, SDK, CGI                                                                                                    |

## Interface

|           |                                                    |
|-----------|----------------------------------------------------|
| Network   | 1 × RJ-45, 10/100 Mbps self-adaptive Ethernet port |
| PoE       | 4 Ports (IEEE 802.3af), 32W                        |
| HDMI      | 1                                                  |
| VGA       | 1                                                  |
| Audio I/O | 1/1                                                |
| Alarm I/O | 4/1                                                |
| USB       | 3 ports (USB 2.0 × 3)                              |

## General

|                      |                                                |
|----------------------|------------------------------------------------|
| Power Supply         | DC48V/1.25A                                    |
| Power Consumption    | < 15 W (without HDD)                           |
| Operating Conditions | -10 °C ~ 50 °C (14 °F ~ 122 °F)                |
| Storage Conditions   | Less than 90% RH                               |
| Certifications       | CE/FCC                                         |
| Dimensions           | 255 × 237 × 47.5 mm (10.04 × 9.33 × 1.87 inch) |
| Net Weight           | 0.9 kg (1.98 lb) without HDD                   |